

INTEGRATED LED ELBOW **PART NUMBER: GL-12E4-3030**



SPECIFICATIONS:

Light Output: 1200 Lumens $\pm$ 10%
 Power: 12 Watts
 Efficacy (Lumens per Watt): 100 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Warm White
 LED Chip Epistar
 Trim Size: 4" (Actual: 5"/127mm)
 Beam Angle: 30°
 Gimbal Angle: 85°
 Dimmable/Reverse or Phase Adaptive
 Dimmers Recommended
 IC Rated
 Damp Location Rated
 35,000 Life Hours
 Power Supply (Driver) Included

LIGHTING FACTS


INTEGRATED LED ELBOW

ITEM NO. GL-12E4-3030

Light Output (Lumens) **1200**
 Watts **12**
 Lumens per Watt (Efficacy) **100**

Colour Accuracy 80+
 Colour Rendering Index (CRI)

Light Colour 3000K Warm White



2700K 3000K 3500K 4000K 4500K 5000K 6000K
 12 Watt • Warm White

PHOTOMETRICS:

MOUNTING HEIGHT (FT.)	CENTER BEAM FOOT CANDLES (FC)	EDGE BEAM FOOT CANDLES (FC)	BEAM AREA COVERED (FT.)
4 FT.	110.0 FC	75.0 FC	2'-2"
6 FT.	48.0 FC	36.0 FC	3'-3"
8 FT.	28.0 FC	18.0 FC	4'-3"
10 FT.	18.0 FC	12.0 FC	5'-4"
12 FT.	13.0 FC	9.0 FC	6'-5"
14 FT.	10.0 FC	5.0 FC	7'-6"
16 FT.	7.0 FC	4.0 FC	8'-7"
18 FT.	6.0 FC	4.0 FC	9'-8"



INTEGRATED LED ELBOW **PART NUMBER: GL-12E4-3030**

ORDERING INFORMATION:

1. Select Trim Colour:


GL-12E4-3030-

W - Matte White

B - Matte Black



PRODUCT DIMENSIONS:

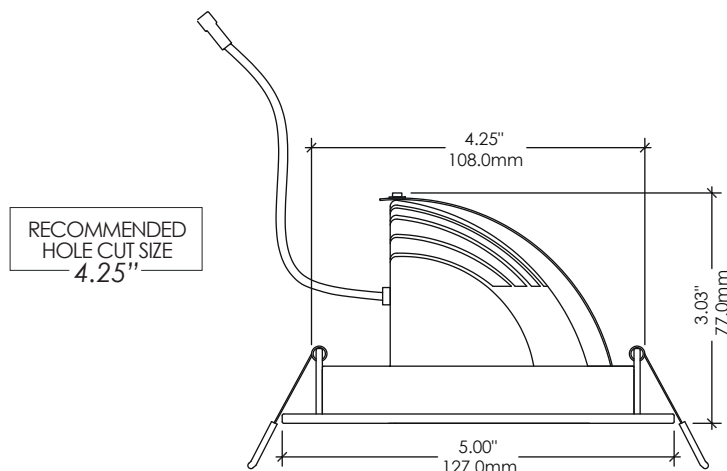

Power Supply (Driver) Size:
 4"-1/2"x 2"-1/4" x 1"-1/2"
 (113mm x 58mm x 37mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP4U**

